

JBC

www.jbctools.com



HT420

THERMAL TWEEZERS

HT420 / THERMAL TWEEZERS

HT420-A
THERMAL TWEEZERS



MANUAL




INSTALLATION

DD-2B/DD-1B/DD-9B
CONTROL UNIT



HT-SD
STAND



Power cord socket

Equipotential connection

Cartridge C420





HT420-A
Thermal tweezers



Connectable control units: DI, DD, DM and RM.

CHANGING THE CARTRIDGE

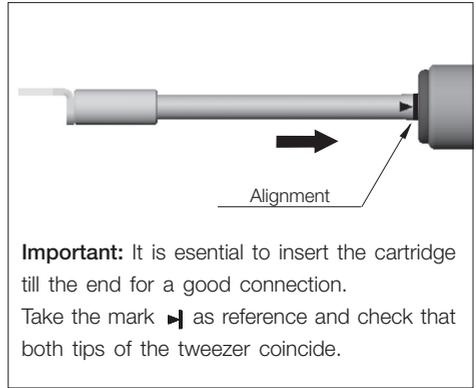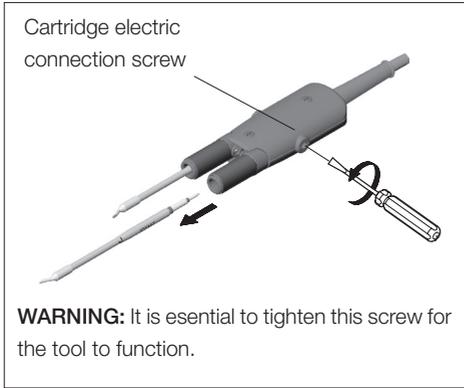


RANGE OF CARTRIDGES

Chip Components


C420-271 A=1,5mm

C420-272 A=2,6mm



Blade Type


C420-283 A=50mm



QFP y PLCC

C420-279 A=8mm



C420-280 A=11mm



Cable stripper

C420-281

C420-282



Dual in line

C420-273 A=4mm

C420-274 A=6mm


C420-275 A=8mm

C420-276 A=10mm

C420-277 A=15mm

C420-278 A=20mm

C420-285 A=22mm



Consult our wide range of cartridges with more than 250 references in www.jbctools.com. For special cartridges contact with our distributor.

TECHNICAL SPECIFICATIONS

- Total weight without cartridge: 102 gr. aprox
- ESD Safe



This product should not be
thrown in the garbage.

JBC

WARRANTY

JBC's 2 years warranty guarantees this equipment against all manufacturing defects, covering the replacement of defective parts and all necessary labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased enclosing this fully filled in, sheet.

SERIAL N°

STAMP OF DEALER

DATE OF PURCHASE

www.jbctools.com